

EB2S 160/4SF 125A 4p



Specificatii

Cod ETI	004671849
Descriere	EB2S 160/4SF 125A 4p
Denumire clasă	Înterupător de circuit în car
Funcie	MCCB
Curent nominal (A)	125
Număr de poli	4
Standarde	60947
Tipul conexiunii	front connection
Tensiunea nominala de rezistenta Uimp (kV)	8
Tensiunea nominala (V AC)	690V
Tensiune nominala de izolare (V)	800
Capacitate nominala de scurtcircuit la 415 V Icu/Ics (kA)	25/13
Tensiune nominala de lucru (V DC)	250V
Reglare termica	fixed
Ajustare magnetica	fixed
Reglabil sau fix	Fix

Pagina de produse online

Alta documentatie



Catalog caracteristici tehnice

Model 3D

Manual de instructiuni


Declaratie CE

Eplan mușchi

ETIM clasificare internationala


Clasificare	EC000228
Denumire clasă	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I _u	125A
Rated short-circuit breaking capacity I _{cu} at 400 V, 50 Hz	25kA
Overload release current setting	125...125A
Adjustment range undelayed short-circuit release	1500...1500A
Integrated earth fault protection	
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	1
Number of poles	4
Type of control element	Rocker lever
Motor drive integrated	
Motor drive optional	
Degree of protection (IP)	IP20

Caracteristici

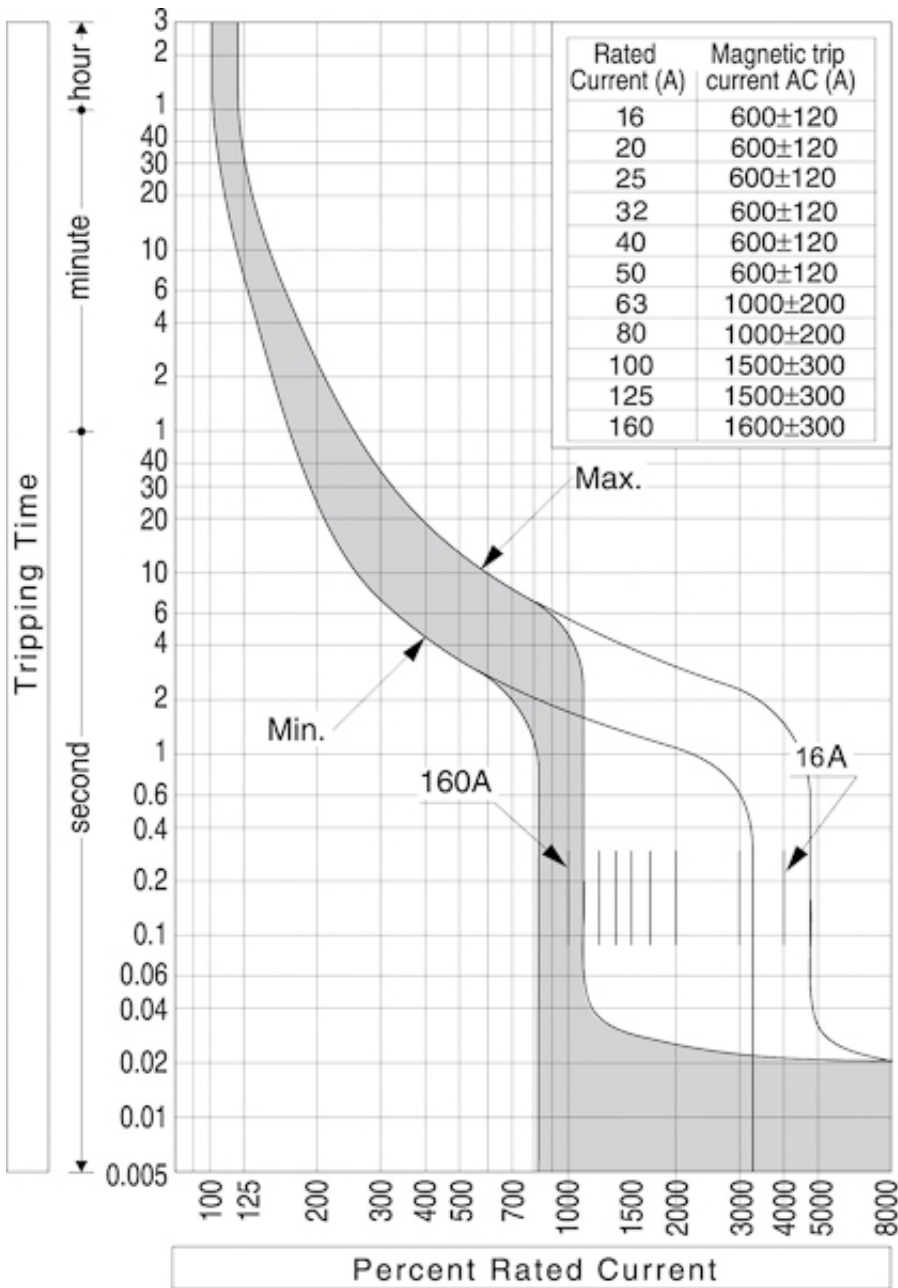

Desen cotat

EB2S 160 F & A

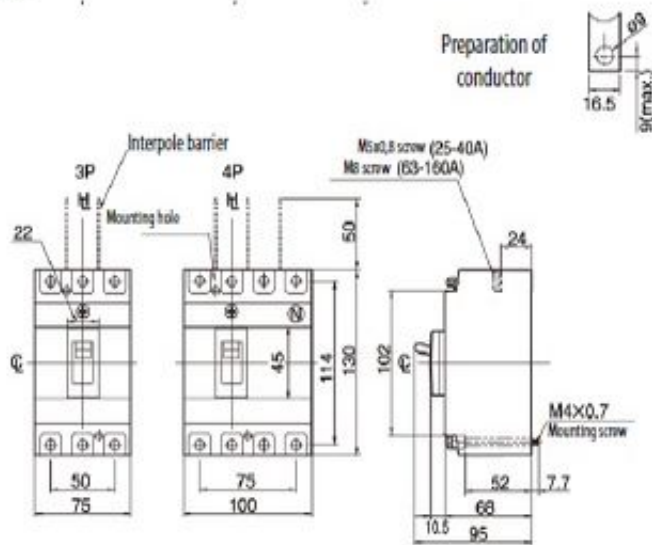

EB2S 250 F & A

