

Date tehnice pentru produs: BK080203--

Dulap distrib. apl. IP65, 24UH, 2 rând. cu ușa transparentă



SCHRACK-Info

- Wall-mounted enclosures with transparent door
- Lock: rotary knob, a small cylinder can be installed
- Includes PE and N terminals
- Protection class II
- Halogen-free according to RoHS
- UV stability and weather resistant
- Rated voltage 400VAC, 1500VDC / In=63A
- Ambient temperature: -25° to +60°C
- Glow wire test: 650°C
- Lock: RONIS small cylinder possible
- Material: ASA
- Degree of protection IP65
- RAL7035 light grey




Fișe tehnice

Fișe tehnice - Continuare

| | |
|--|---------------------|
| Lățime netă (mm) | 319,00 |
| Înălțime (mm) | 384,00 |
| Adâncime netă (mm) | 144,00 |
| Masă netă (kg.) | 1,70 |
| COD EAN | 9004840614978 |
| disipare (W) | -24,00 |
| Temperatura minimă a mediului ambiant (°C) | -20 |
| Temperatura maximă a mediului ambiant (°C) | 70 |
| Versiune | cu ușă pe tencuială |
| Material ușă | plastic |
| Rânduri | 2 |
| module / rând | 12 |
| grad de protecție | IP65 |
| Culoare | RAL7035 |

Desen dimensional: Dulap distrib. apl. IP65, 24UH, 2 rând. cu ușă transparentă

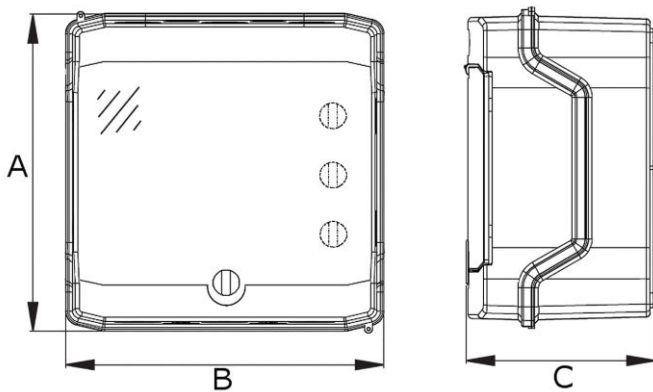

Tabel de date: Dulap distrib. apl. IP65, 24UH, 2 rând. cu ușă transparentă

| Article number | A [mm] | B [mm] | C [mm] | Rows | MW | Radiant power loss [W]* |
|----------------|-----------|-----------|-----------|------|----|----------------------------|
| BK080200 | 201 | 128 | 120 | 1 | 4 | -10 |
| BK080201 | 201 | 202 | 120 | 1 | 8 | -13 |
| BK080202 | 259 | 319 | 144 | 1 | 12 | -16 |
| BK080203 | 384 | 319 | 144 | 2 | 24 | -24 |
| BK080204 | 508 | 319 | 144 | 3 | 36 | -26 |
| BK080205 | 663 | 319 | 144 | 4 | 48 | -35 |
| BK080206 | 259 | 428 | 142 | 1 | 18 | -20 |
| BK080207 | 201 | 165 | 120 | 1 | 6 | -14 |

*Max. radiated power of housing calculated as a wall-mounted single fixed with $\Delta T = 35K$.

Detailed information and legal notes see page

Tabel articole

| Descriere | Cod comandă |
|---|-------------|
| Dulap distrib. apl. IP65, 24UH, 2 rând. cu ușă transparentă | BK080203 |
| Accesorii opționale | |
| Încuietoare cilindru pentru BK08... IP65 aplicat | BK080095 |